

ACTIVE sit-stand desks



FEATURES

- Telescopic frame
- Equipped with two motors
- Column type – DOWN version
- Two types of lifting columns with anti-collision
- Three types of feet
- Two types of height adjustment buttons

QUALITY STANDARD

- EN 527-1:2011
- EN 527-2:2016
- EN 1730:2012

TECHNICAL INFORMATION

Desktop

- 25 mm MFC (melamine) with 2 mm ABS edging;
- With or without a cut-out for grommet and wire management;
- With or without a scallop for wire management.

Desk control button types

- JA – up and down drive; 2 memory positions;
- PA – up and down drive, 2 memory positions and screen that shows current height.



JA

PA

Types of feet



Type I

- Metal tube – 700x70x20 mm;
- Height levelling plastic feet (+10 mm);
- Powder coated metal, matches the colour of frame.



Type Q

- Metal sheet 700x80x31 mm with welded profile for stability;
- Height levelling plastic feet (+10 mm);
- Powder coated metal, matches the colour of frame.



Type Z

- Metal tube – 700x75x31 mm with welded profile for stability;
- Height levelling plastic feet (+10 mm);
- Powder coated metal, matches the colour of frame.

Adjustable telescopic frame

- Square steel pipe dimensions: 50x25x551 mm
- Side support steel L shape 62x20x520 mm
- Adjustment range - 600 mm;
- Steel pipe part for adjustment - 40x20x870 mm;
- Powder coated metal, matches the colour of columns and feet.

Lifting columns

- Types: two (2) or three (3) level columns;
- Anti-collision feature;
- Two motors;
- Soft start and soft stop;
- Lifting speed: up to 40 mm/ sec;
- Stroke length: 470 mm (two (2) level column) / 650 mm (three (3) level column);
- Rectangular tube dimensions: two (2) level column 50x70, 60x80 mm, three (3) level column 40x60, 50x70, 60x80 mm;
- Lifting capacity: 100 kg;
- Glide system solution prevents desk columns from possible paint scratches;
- Powder coated metal, matches the colour of frame and feet.



Two (2) level column





Three (3) level column

ELECTRICAL SPECIFICATION

Electronic data power unit

- Input: 110-240 V;
- Frequency: 50/60 Hz;
- Output: Button JA 29V, Button PA 35V
- Power Plug: 2-pol; EU, UK, CH, US;
- Energy consumption in standby mode: button JA 0,5W, button PA 0,2W;
- Operating Cycle: 1 minute on, 9 minutes off.

RANGE

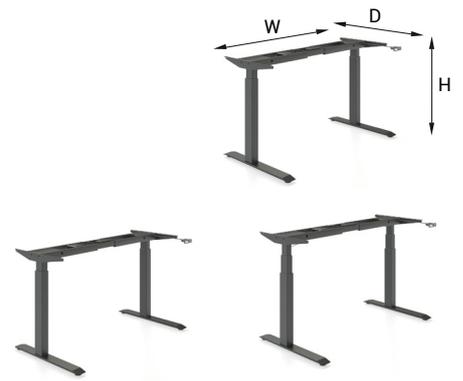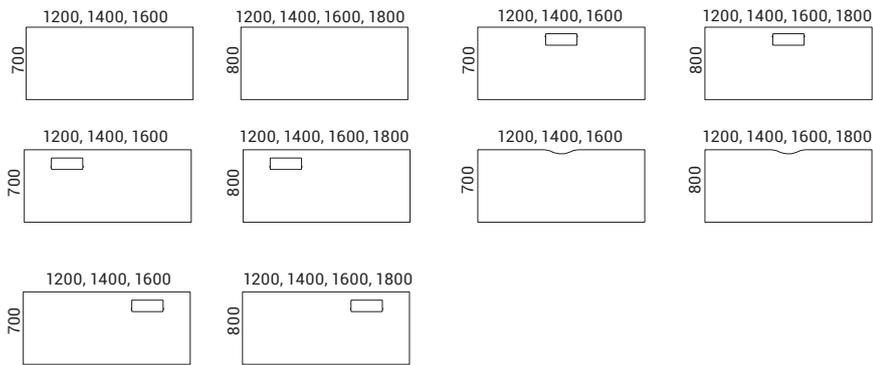

W 1146/1346/1546/1746 W 1146/1346/1546/1746
 D 700 D 700
 H 698-1168 H 617-1267

Must be ordered

(for desktops with cut-out)



Metal grommet:
 317x119 mm, H=27 mm

Optional



Cable trays



Power socket blocks



Cable ducts



Screens



Felt-lined metal
 drawer with lock